


- (6) When the final step of adding fuel is plotted, the point falls within the envelope at 5141 pounds and 100.5 inches aft of datum. (The fuel graduations on the plotter run from 0 to 140 gallons. The tanks will always contain 4 gallons of unusable fuel, and these two figures total to the listed tank capacity of 144 gallons.)


**NOTE**

The addition of fuel to gross weight of 5200 pounds is restricted by the aft C.G. limitation of 100.5 inches. In this case fuel would be limited to approximately 133 gallons.

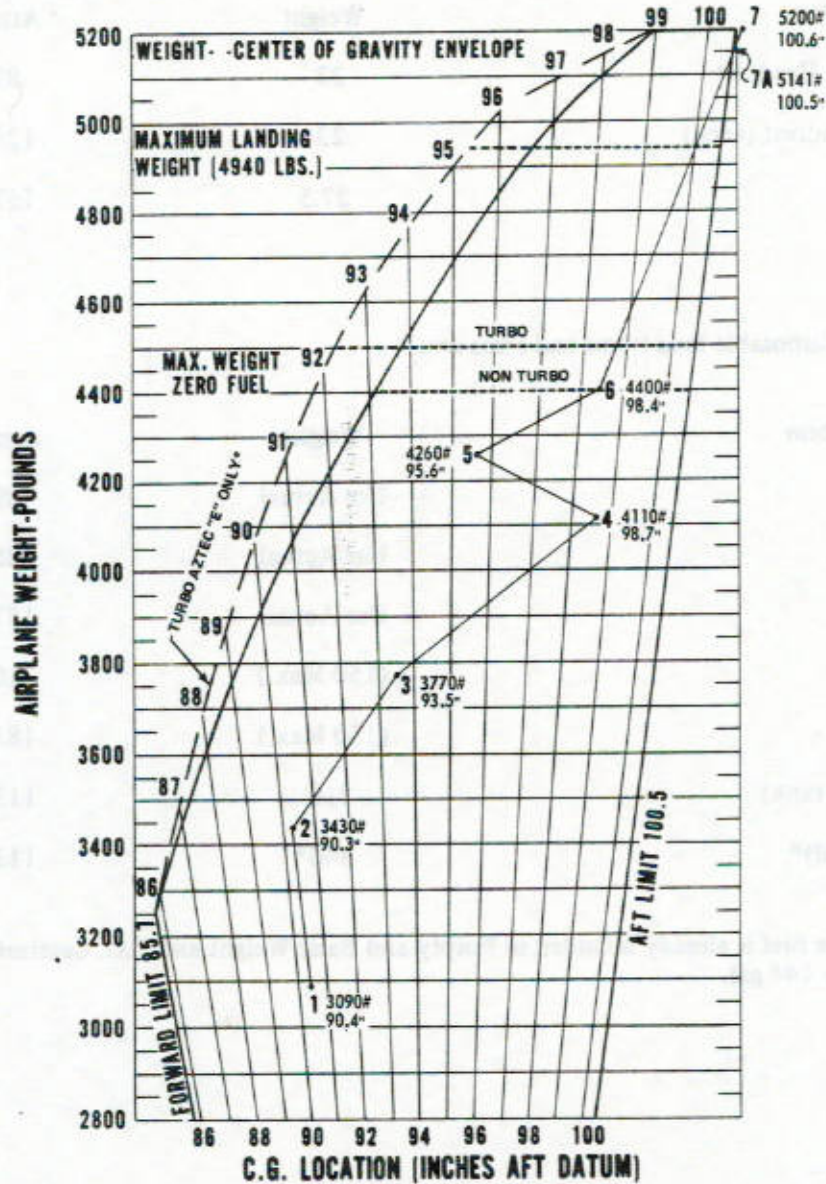

\*DASHED FORWARD ENVELOPE APPLICABLE ONLY FOR TURBO AZTEC "E," S/N 27-4781 AND SUBSEQUENT, OR TURBO AZTEC "E" PRIOR TO S/N 27-4781 IF SERVICE KIT 760 587 HAS BEEN INSTALLED.

**AZTEC "E"**

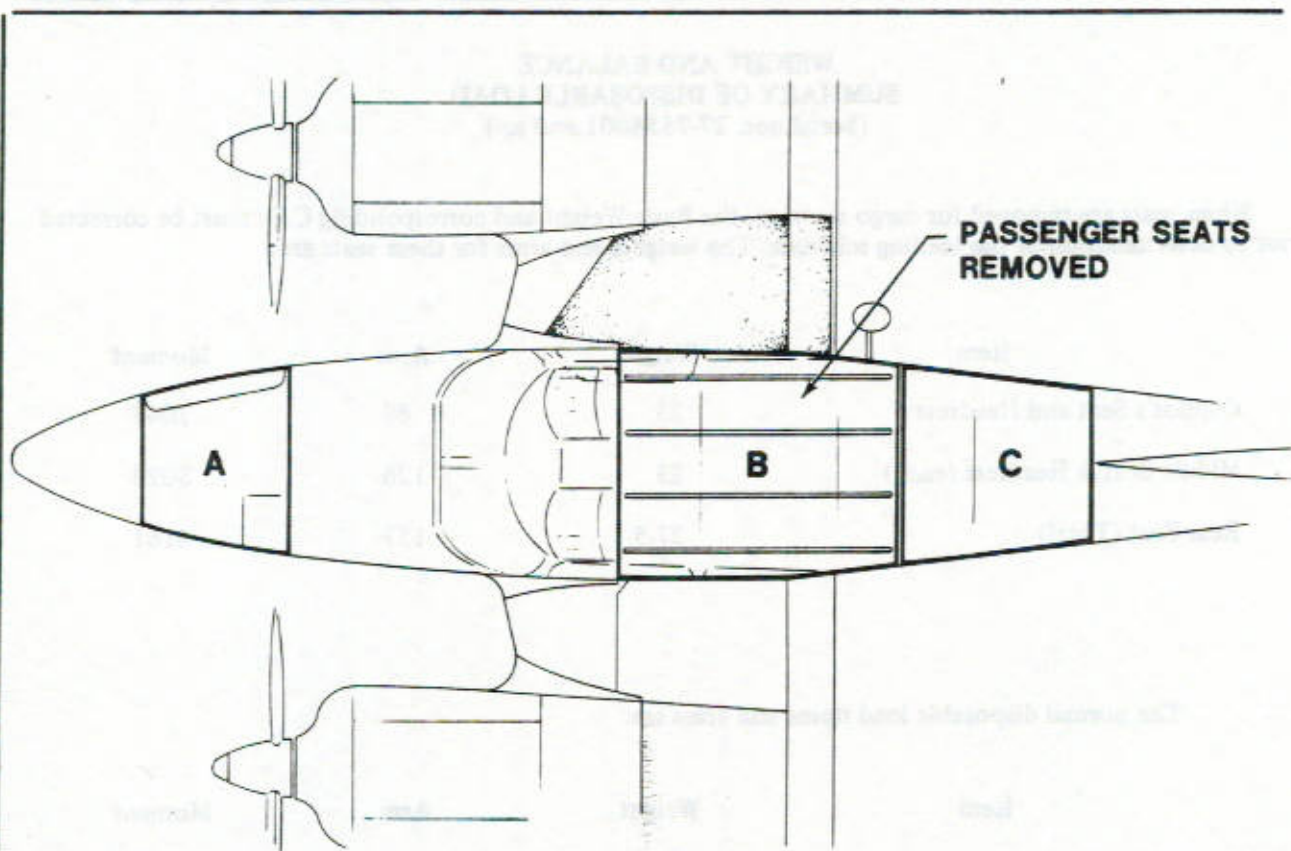

**MAXIMUM CAPACITY**

AREA	FLOOR LOAD LBS/SQ. FT.	ALLOWABLE LBS
A	100	150
B	43	820
C	100	*150 (INCLUDING 20 LBS ON SHELF)

\*105 LB. MAX. IF OXYGEN IS INSTALLED.

**MAXIMUM TIE DOWN CAPACITY**

PER TIE DOWN RING	95 LB
PER TRACK	190 LB
REAR SEAT BELT FITTINGS	85 LB PER FITTING

**CARGO MUST BE LOADED WITHIN THE WEIGHT AND BALANCE LIMITS OF THIS AIRCRAFT.**

Cargo Loading